

# MDG170PH

MAYTAG® COMMERCIAL  
ON-PREMISES DRYING TUMBLER



## LEGENDARY MAYTAG DEPENDABILITY

Maximizing your equipment investment for over a half century.

### KEEP YOUR OPERATION SAFE

The Sensor-Activated Fire Extinguishing System (S.A.F.E.) is a unique, controlled extinguisher that automatically detects a dryer fire, douses it with water and alerts you that the system has been activated.



### SAVE TIME AND ENERGY COSTS

When your operation depends on a constant supply of clean laundry, the huge 170-pound capacity of the MDG170PH dries more at once to maximize efficiency. Plus, the extra-large door opening makes loading and unloading easier.

### MICROPROCESSOR CONTROLS

Advanced computer controls let you program drying cycles with desired drying times, temperatures and cool-down. Then select the cycle with the simple touch of a button.

### FOR YOUR OPERATION:

- 170-Pound Capacity Dries More At Once
- Auto Cycle Prevents Overdrying
- S.A.F.E. System Puts Out Dryer Fires
- Programmable Anti-Wrinkle Feature
- Display Counts Down Time Remaining In Cycle
- Extra-Large Door Opening
- Extra-Large Lint Compartment
- Easy-Access Design For Convenient Self-Service
- Optional Reverse Tumbler Feature Reduces Twisting
- Removable Top Section For Easier Installation

### BUILT-TO-LAST™ FEATURES:

- Sealed Bearings Never Need Lubrication
- Heavy-Duty Motor
- 3-Year Limited Warranty—All Parts Covered



Visit [maytagcommerciallaundry.com](http://maytagcommerciallaundry.com) or call 800-662-3587




**MDG170PH**  
MAYTAG® COMMERCIAL  
ON-PREMISES  
DRYING TUMBLER

## MAYTAG® COMMERCIAL ON-PREMISES DRYING TUMBLER MICROPROCESSOR CONTROL

DRYER SPECIFICATIONS	
<b>MODEL</b>	MDG170PH
<b>CAPACITY</b>	
Capacity—lbs. (kg) dry weight	170 (77)
Capacity—cu. ft. (cu. m)	51.20 (1.45)
Tumbler diameter—in. (mm)	51.50 (1,308)
Tumbler depth—in. (mm)	42.50 (1,080)
<b>REVERSING TUMBLER</b>	Yes
<b>BLOWER MOTOR</b>	
HP (kw) (blower)	7.5 (5.6)
<b>DRIVE MOTOR</b>	
HP (kw) (drive)	1.0 (.75)
Tumbler speed—rpm	37
<b>AIRFLOW</b>	
Cfm (cmm) per pocket	3,700 (104.8)
<b>GAS RATING</b>	
BTU/hr. (kcal/hr.)	550,000 (138,600)
Gas inlet—F.N.P.T. in. (mm)	1.5 (38.1)
<b>ELECTRICAL REQUIREMENTS</b>	
Volts (Hz)/phase	
Domestic models—(3-wire + ground)	208–240 (60)/3PH
Export models—volts (Hz)/phase	208–240/50–60Hz/ 1PH or 3PH
<b>BREAKER/FUSE REQUIREMENTS—AMPS</b>	
Each drying chamber	60
<b>COLOR</b>	
White	Yes
<b>APPROXIMATE WEIGHT</b>	
Crated—lbs. (kg)	2,269 (1,029)
Uncrated—lbs. (kg)	2,103 (954)
<b>DIMENSIONS</b>	
A) Height—in. (mm)	100 (2,540)
B) Width—in. (mm)	55.88 (1,419)
C) Depth including door handle—in. (mm)	62.5 (1,588)
D) Floor to center of exhaust—in. (mm)	19.25 (489)
E) Exhaust duct diameter—in. (mm)	18 (457)
Door opening diameter—in. (mm)	31.38 (797)

See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

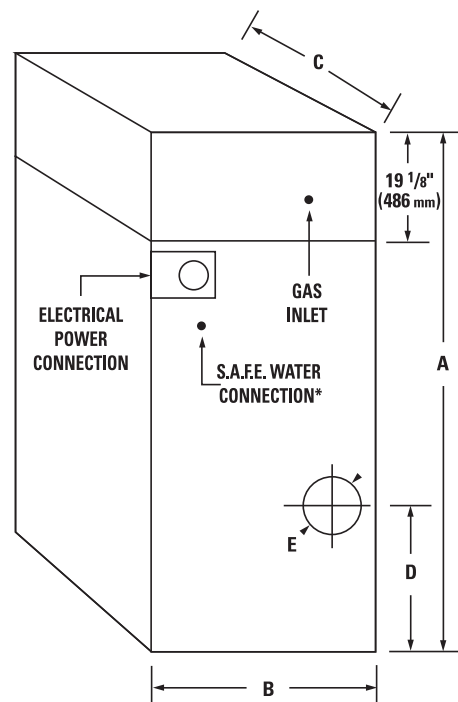

\*S.A.F.E. water pressure requires 40 psi ± 20 psi.  
Requires 1/2" (12.7 mm) water hose connection.



NEW YORK CITY  
M.E.A.



### MAYTAG® LIMITED WARRANTY 3 YEARS—ALL PARTS

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.

## OUR COMMITMENT TO DEPENDABLE QUALITY

At Maytag brand, we believe durable goods should remain just that. That's why every Maytag® product is constructed of the highest-quality materials and with the utmost in precision craftsmanship. It's also why we stand behind our equipment with solid service and support from our professional Maytag laundry suppliers. Simply put, when you choose Maytag® products, you ensure your peace of mind.