

MDG120PH

MAYTAG® COMMERCIAL ON-PREMISES DRYING TUMBLER



LEGENDARY MAYTAG DEPENDABILITY

Maximizing your equipment investment for over a half century.

KEEP YOUR OPERATION SAFE

The Sensor-Activated Fire Extinguishing System (S.A.F.E.) is a unique controlled extinguisher that automatically detects a dryer fire, douses it with water and alerts you that the system has been activated.



MICROPROCESSOR CONTROLS

Advanced computer controls let you program drying cycles with desired drying times, temperatures and cool-down. Then select the cycle with the simple touch of a button.



FOR YOUR OPERATION:

- 120-Pound Capacity Dries More At Once
- Auto Cycle Prevents Overdrying
- S.A.F.E. System Puts Out Dryer Fires
- Programmable Anti-Wrinkle Feature
- Display Counts Down Time Remaining In Cycle
- Extra-Large Door Opening
- Extra-Large Lint Compartment
- Easy-Access Design For Convenient Self-Service
- Optional Reverse Tumbler Feature Reduces Twisting
- Removable Top Section For Easier Installation

BUILT-TO-LAST™ FEATURES:

- Sealed Bearings Never Need Lubrication
- Heavy-Duty Motor
- 3-Year Limited Warranty—All Parts Covered



Visit maytagcommerciallaundry.com or call 800-662-3587




MDG120PH
MAYTAG® COMMERCIAL
ON-PREMISES
DRYING TUMBLER

MAYTAG® COMMERCIAL ON-PREMISES DRYING TUMBLER
MICROPROCESSOR CONTROL

DRYER SPECIFICATIONS	
MODEL	MDG120PH
CAPACITY	
Capacity—lbs. (kg) dry weight	120 (54)
Capacity—cu. ft. (cu. m)	38.2 (1.08)
Tumbler diameter—in. (mm)	44.5 (1,130)
Tumbler depth—in. (mm)	42.5 (1,079)
REVERSING TUMBLER (OPTIONAL)	Yes
BLOWER MOTOR	
HP (kw) (blower)	3 (2.24)
DRIVE MOTOR	
HP (kw) (drive)	.75 (.56)
Tumbler speed—rpm	38
AIRFLOW	
Cfm (cmm) per pocket	2,150 (60.9)
GAS RATING	
BTU/hr. (kcal/hr.)	375,000 (94,500)
Gas inlet—F.N.P.T. in. (mm)	1.25 (31.8)
ELECTRICAL REQUIREMENTS	
Volts (Hz)/phase	
Domestic models	208–240 (60)/3PH
Export models—options available	208–240V/50–60Hz/ 1PH or 3PH
BREAKER/FUSE REQUIREMENTS—AMPS	
Each drying chamber	20
COLOR	
White	Yes
APPROXIMATE WEIGHT	
Crated—lbs. (kg)	1,489 (675)
Uncrated—lbs. (kg)	1,349 (612)
DIMENSIONS	
A) Height—in. (mm)	86.88 (2,207)
B) Width—in. (mm)	48.75 (1,238)
C) Depth including door handle—in. (mm)	62.5 (1,588)
D) Floor to center of exhaust—in. (mm)	9.5 (241)
E) Exhaust duct diameter—in. (mm)	14 (356)
Door opening diameter—in. (mm)	31.38 (797)

See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

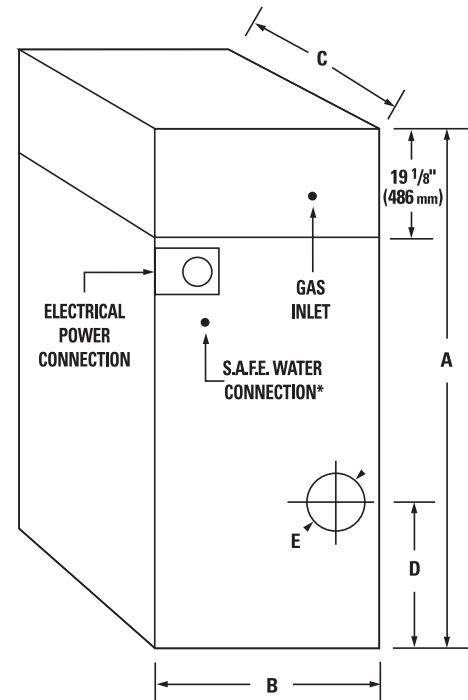

*S.A.F.E. water pressure requires 40 psi ± 20 psi. Requires 1/2" (12.7 mm) water hose connection.



NEW YORK CITY
M.E.A.



MAYTAG® LIMITED WARRANTY
3 YEARS—ALL PARTS

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.

OUR COMMITMENT TO DEPENDABLE QUALITY

At Maytag brand, we believe durable goods should remain just that. That's why every Maytag® product is constructed of the highest-quality materials and with the utmost in precision craftsmanship. It's also why we stand behind our equipment with solid service and support from our professional Maytag laundry suppliers. Simply put, when you choose Maytag® products, you ensure your peace of mind.